

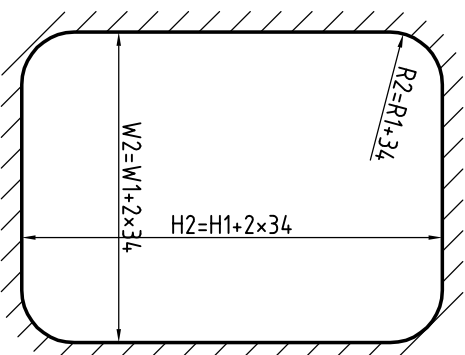


Materials:
 Weldingframe: Mild steel
 Retaining list: Stainless steel
 U-Sealant: Fireretarding rubber
 Glasspane: Fireretarding glass,
 type: CF60N2
 Screws: Stainless steel DIN 966, M6x4.0

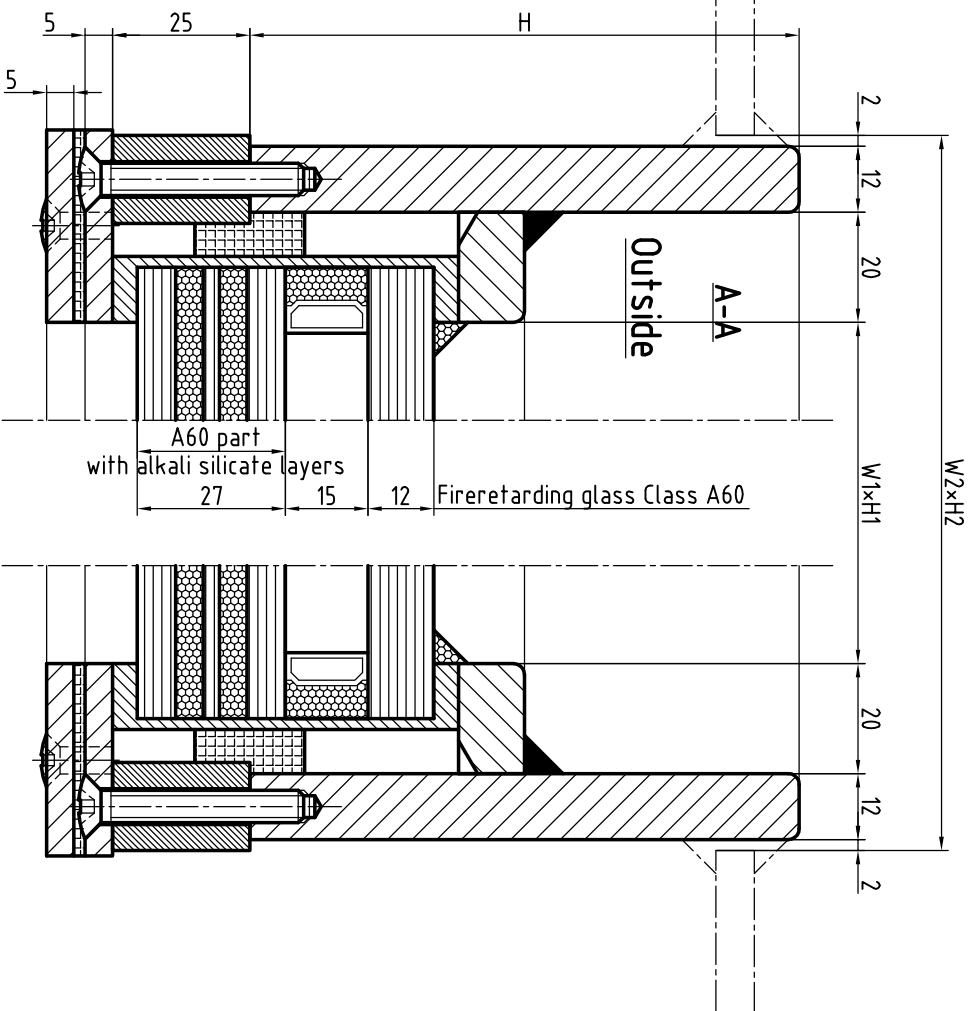

Hole in plate

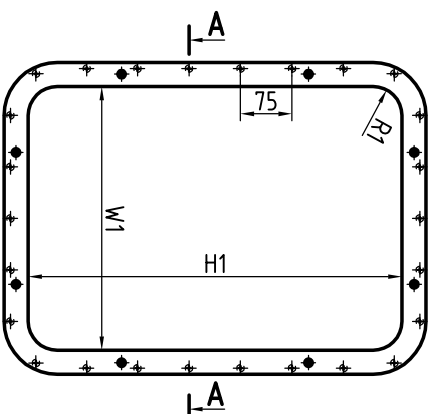

Glass thickness combinations:
 outside 12mm - 15mm air filled - A60(27mm)
 outside 15mm - 12mm air filled - A60(27mm)
 outside 19mm - 10mm air filled - A60(27mm)

Frame height - standard H=80

PROMAP LTD.		Drawn:	Date:
Bydgoszcz, POLAND		Skenski	01-04-2014
Fixed window A60 class			
Tel: +48 52 3216131		Fax: +48 52 3764726	
Email: promap@promap.eu			
AutoCAD file no.			
WFW-05			