

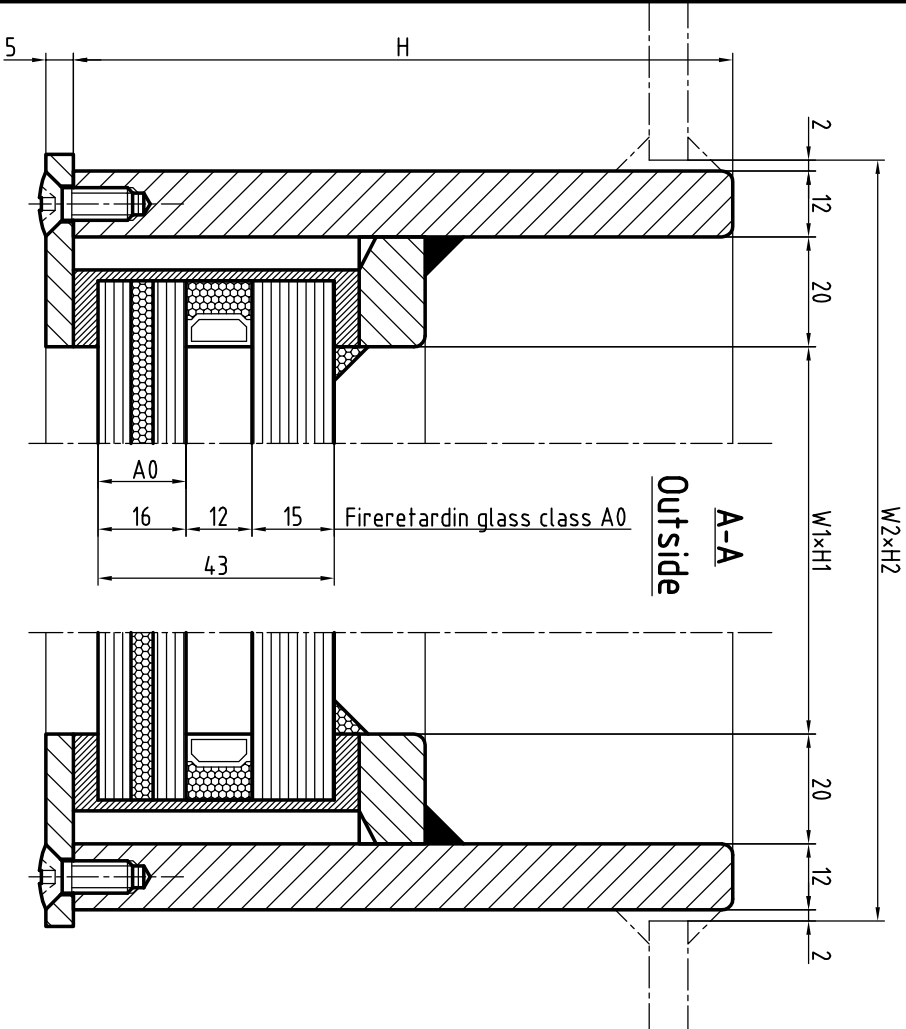


Materials:  
 Weldingframe: Mild steel  
 Retaining list: Stainless steel  
 U-Sealant: Fireretarding rubber  
 Glasspane: Fireretarding glass,  
 type: Contraflam Lite N2  
 Screws: Stainless steel DIN 966, M6x16

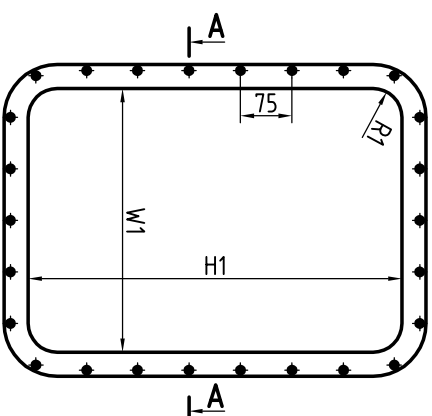

Hole in plate

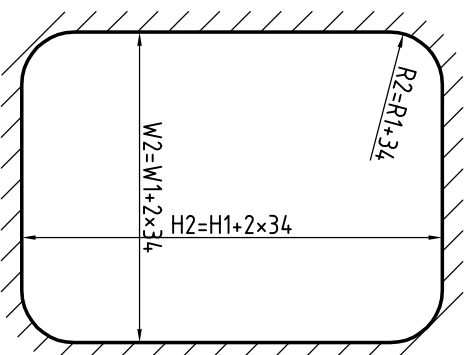

Frame height-standard H=80

Glass thickness combinations:  
 outside 12mm - 15mm air filled - A0(16mm)  
 outside 15mm - 12mm air filled - A0(16mm)  
 outside 19mm - 10mm air filled - A0(16mm)

Frame height-standard H=80

<b>PROMAP LTD.</b>	
<b>Bydgoszcz, POLAND</b>	
Drawn: Skenski	Date: 01-04-2014
<b>Fixed window A0 class</b>	
Tel: +48 52 3216131	Fax: +48 52 3764726
Email: promap@promap.eu	
AutoCAD file no. <b>WFW-06</b>	