
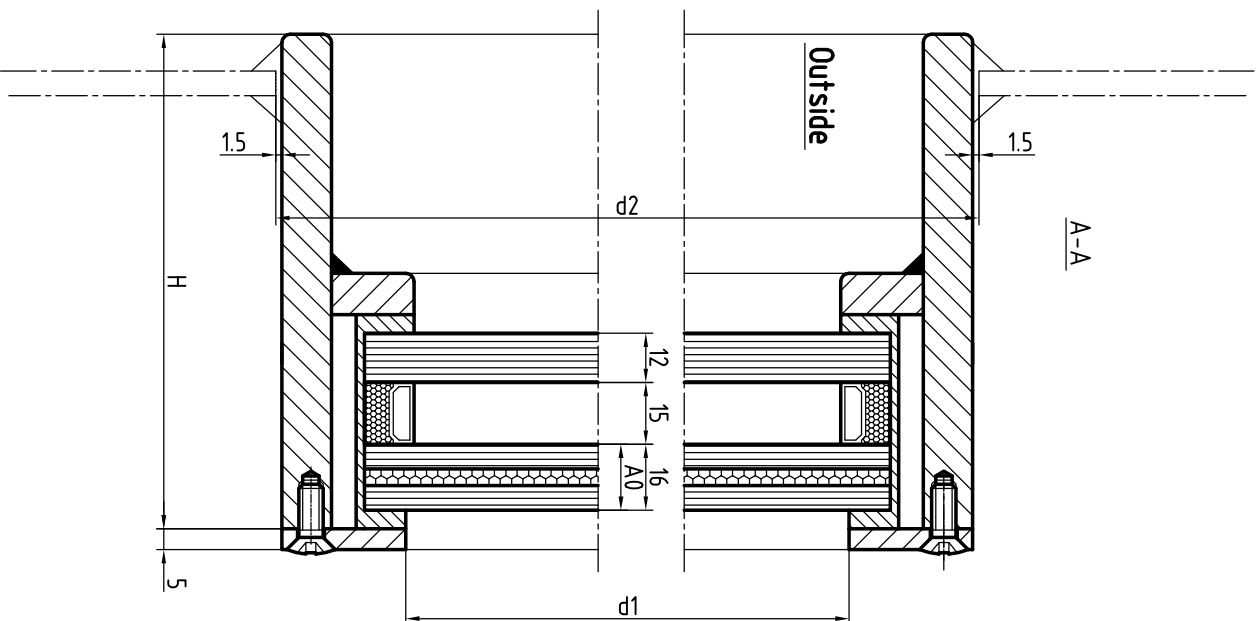
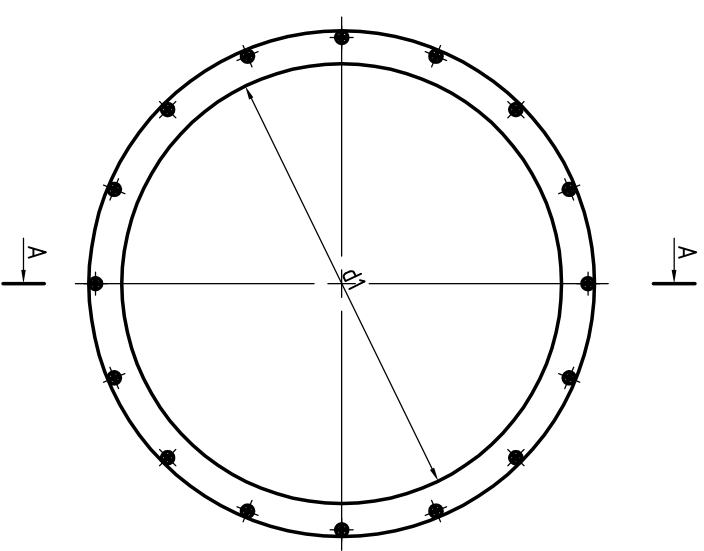


Hole in plate

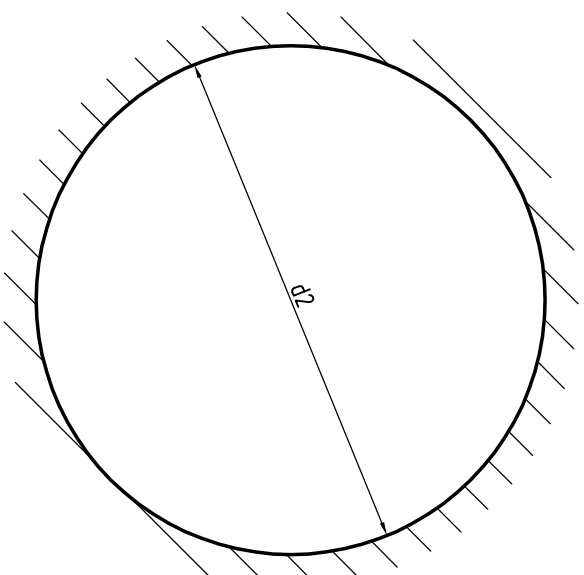

Nominal size	Hole in plate	Frame height
d1	d2	
250	308	standard-80mm
300	363	
350	413	
400	463	
450	513	

Glass thickness combinations:

- outside 12mm - 15mm air filled - A0(16mm)
- outside 15mm - 12mm air filled - A0(16mm)
- outside 19mm - 10mm air filled - A0(16mm)

Materials:

- Weldingframe: Mild steel
- Retaining list: Stainless steel
- U-Sealant: Fireretarding rubber
- Glasspane: Fireretarding glass, type: CF-Lite-N2
- Screws: Stainless steel DIN 966, M6x16

PROMAP LTD.		Drawn:	Date:	
Bydgoszcz, POLAND		Skenski	01-04-2014	
Fixed sidelight A0 class		Title		
Tel: +48 52 3216131 Fax: +48 52 3764726		AutoCAD file no.		
Email: promap@promap.eu		SFW-04		